



ARUBA 3

GAS-FIRED HOT WATER BOILER

Designed for reliability, efficiency and performance. For residential and small commercial applications with approved chimney.

Series AWI - Aruba 3 Features

- ✓ **CAST IRON HEAT EXCHANGER**
- ✓ **AVAILABLE IN THREE PIPING AND CONTROL CONFIGURATIONS ***
- ✓ **BUILT-IN DRAFT DIVERTER TO FIT LOW SPACES**
- ✓ **RELIABLE HONEYWELL CONTROLS**
- ✓ **ATTRACTIVE, RUGGED JACKET**
- ✓ **NINE SIZES FROM 37,000 TO 295,000 BTU**
- ✓ **DESIGNED FOR INSTALLATION ON COMBUSTIBLE FLOORS**
- ✓ **LIMITED LIFETIME WARRANTY**

* SEE BACK SIDE FOR PIPING AND CONTROL CONFIGURATIONS

CrownBoiler.com







Constructed and tested
in accordance with
ASME Section IV

SERIES AWI - ARUBA 3 TECHNICAL INFORMATION


RIGHT SIDE CONFIGURATION (STANDARD)

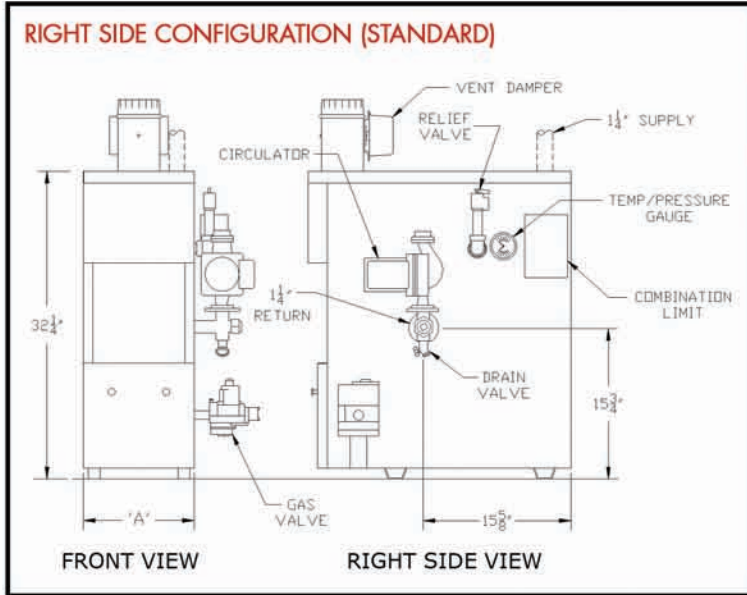

LEFT SIDE CONFIGURATION (OPTIONAL)

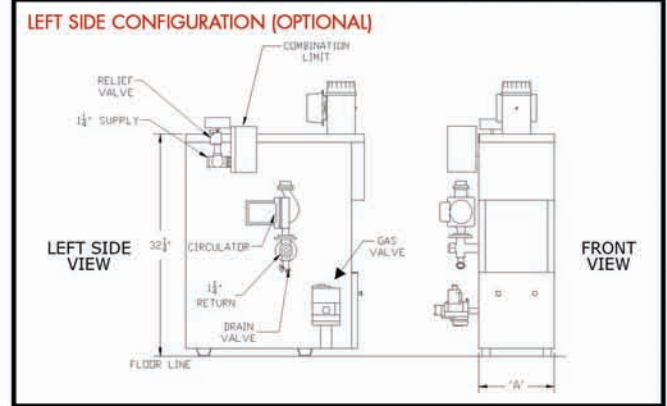

TOP CONFIGURATION (OPTIONAL)

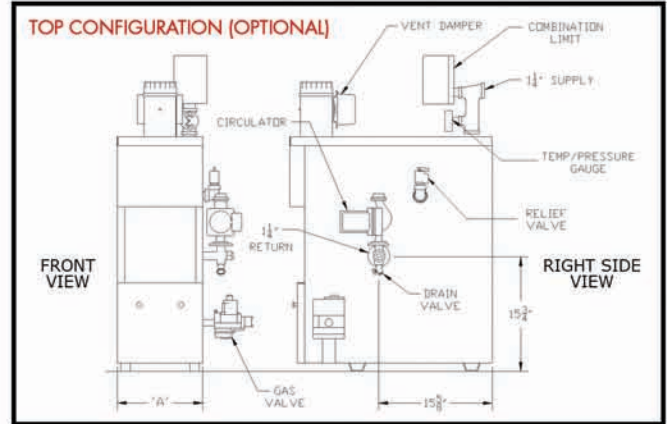

MODEL NUMBER	NO. OF SECTIONS	NATURAL OR LP GAS			AFUE %		DIMENSION (INCHES) A	FLUE COLLAR DIAMETER (INCHES)	WATER CONTENT (GALS.)	SHIPPING WEIGHT (APPROX.)
		INPUT (BTU/HR)	D.O.E HEATING CAPACITY (BTU/HR)	IBR NET RATING (BTU/HR)	STANDING PILOT	ELECTRONIC IGNITION				
AWI037	2	37,000	30,000	26,000	NA	82.3	10 - 1/2	4	2.4	217
AWI061	3	61,000	50,000	43,000	80.0	82.6	11 - 3/4	4	3.2	267
AWI095	4	95,000	78,000	66,000	80.1	82.3	15	5	4.0	317
AWI128	5	128,000	105,000	91,000	80.2	82.0	18 - 1/4	6	4.7	367
AWI162	6	162,000	132,000	115,000	80.3	81.7	21 - 1/2	6	5.5	417
AWI195	7	195,000	159,000	138,000	80.4	81.4	24 - 3/4	7	6.3	467
AWI229	8	229,000	186,000	162,000	80.4	81.2	28	7	7.0	517
AWI262	9	262,000	212,000	184,000	80.5	80.9	31 - 1/4	8	7.8	567
AWI295	10	295,000	238,000	207,000	80.7	80.6	34 - 1/2	8	8.6	617

- STANDARD PIPING/CONTROL SYSTEM IS RIGHT SIDE. SPECIFY TOP OR LEFT SIDE CONFIGURATION
- ALTITUDES ABOVE 2,000 FT. - RATINGS SHOULD BE REDUCED AT A RATE OF 4% FOR EACH 1,000 FT. ABOVE SEA LEVEL (USA ONLY)
- SPECIFICATIONS AND DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

All residential cast iron boilers include a full one year warranty. A limited, lifetime warranty is provided for the cast iron heat exchanger. A 5 year and a 10 year extended warranty covering parts and labor are also available. Visit CrownBoiler.com for complete details.

ADDITIONAL FEATURES / BENEFITS

- Available in standing pilot or electronic ignition
- Available with natural or LP gas
- Combination high limit/circulator relay control regulates water temperature
- Aquastat mounted directly into heat exchanger for improved response
- High performance circulator; automatic vent damper
- Roll-out switch; spill switch; ASME relief valve (30 PSI)
- Stainless Steel burners



CrownBoiler.com
PHILADELPHIA, PA